# ASIA ELEPH® — Super-Silent Mobile Power Station
## AEE-D-I Series (Power: 250 – 400 kW)

+86 025 5811 8558
sales@asiaeleph.com

# ASIA ELEPH®

## Rental Generator Sets



| Item | Technical Data |
|---|---|
| Power range (kW) | 250 – 400 |
| Rated frequency (Hz) | 50/60 |
| Engine options | Cummins/Volvo/Scania/Perkins/Weichai/Hanma |
| Engine speed (rpm) | 1500/1800 |
| Engine fuel consumption | ≤ 187 g/kWh* |
| Alternator options | Stamford/Mecc Alte/Dingge |
| Power factor | 0.8 |
| Three-phase rated voltage (V) | 380–480 V |
| Control system | Digital |
| Frequency drop | ≤ 3 % |
| Frequency recovery time | ≤ 3 s |
| Noise limit | ≤ 63±1 dB(A) at 7 m* |
| Protection class | IP44 |
| Fuel tank | Integrated base tank, 1300 L |
| Enclosure | Container type |
| Dimensions (mm) | 4,200 × 1,500 × 2,500 |
| Set weight | 4,000 – 7,000 kg* |

### Applicable Standards

- ISO 8528-5:2018
- ISO 8528-10:2022
- GB/T 2820.5:2025
- CE

### Design Operating Conditions

- Ambient temp.: −15 °C to +50 °C (−40 °C with jacket water heater)
- Altitude: ≤ 2,000 m
- Note: consult the ASIA ELEPH sales team if the operating conditions exceed the above.


### Factory Inspection & Test Items

- Whole-process quality control
- 0 %, 25 %, 50 %, 75 %, 100 %, 110 % load tests
- Control function tests
- Protection function tests

### Surface Treatment & Coating

- Metal surface-treatment process, including shot blasting (shot peening).
- Container coating: marine-transport standard paint or powder coating.
- Corrosion class: C5-M. In accordance with ISO 12944:2017/2018.





ISO9001:2015 质量管理体系认证 | ISO14001 环境管理体系认证 | OHSAS18001 职业与健康管理体系认证 | CE 认证

Notes: (1) Values may vary with engine brand and power rating; (2) The noise limit is the average of readings taken in four directions at 75 % load; (3) Specifications are subject to change due to continuous improvement.


**Jiangsu Golden Waves Energy Technology Co., Ltd.**
Address: 150 Pubin Rd, Jiangbei New Area, Nanjing
http://www.asiaeleph.com

**ASIA ELEPH® Custom Rental**

## ASIA ELEPH Product Features

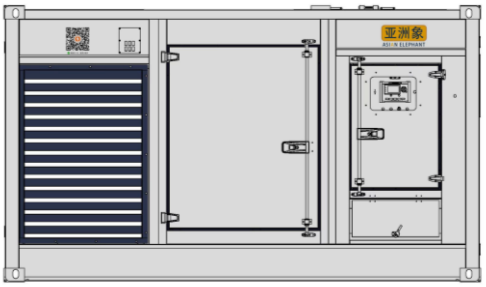


- ASIA ELEPH — a premium global brand customised for rental duty across varied applications;
- Highly integrated super-silent canopy with a small footprint — six sets per 13.7 m step-deck, cutting freight by over 40 %;
- Fully welded container structure — robust, easy to handle and stack;
- Easy to clean, maintain and service;
- Tolerates the range of diesel fuel qualities found across different markets;
- All-weather capability: sand, rain and snow, humid salt fog, high altitude, high and low temperatures;
- Redundant control functions save maintenance time;
- At low load the fan runs at low speed, noise drops sharply; it speeds up automatically at high temperature and high load.

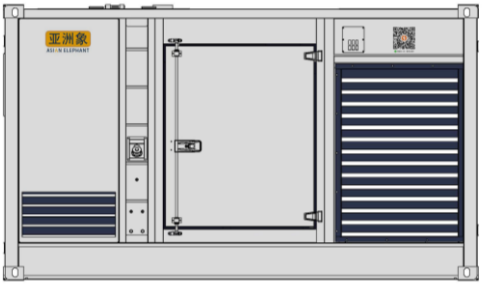


## ASIA ELEPH Product Highlights




- Safety: solid-state battery design concept enables unattended operation with high reliability;
- Super-silent: proprietary noise treatment — 63±1 dB(A) at 7 m (average of four readings);
- Eco-friendly: integrated maintenance module — no oil leakage or seepage during servicing;
- Energy-saving: patented independent three-compartment design delivers remarkable fuel savings;
- Low failure rate: failure rate cut by over 50 % versus shaft-driven and conventional designs;
- Guaranteed output: full rated output at 50 °C ambient with no derating;
- Air purging: electric fuel pump pre-priming — no manual air bleeding after long shutdown;
- Dual fuel filtration: fewer shutdowns caused by clogged filters;
- Large fuel tank: integrated base tank with fuel level display for 24-hour running at normal load;
- Multi-set paralleling: all models can be paralleled for higher power output;
- Lighting: panel light and interior service light for night operation;
- Simple operation: one-touch panel control with running parameters at a glance;
- Protection: IP44 rating suits a wide range of applications.



# Control Panel

## SmartGen HGM9510N

### Paralleling Controller




### Key Advantages

- Remote start/stop — multi-set remote monitoring via HMU15N
- User-friendly interface
- RS485, USB and Ethernet communication ports
- Integrated governor (GOV) and automatic voltage regulator (AVR) ports
- Multi-language support (Chinese, English, etc.)
- AC measurement accuracy: class 0.5; operating temperature −25 to 70 °C

### Main Functions

- 32-bit ARM MCU with a high level of hardware integration for improved reliability;
- 240×128 backlit LCD; menu in Chinese, English and other languages, field-selectable for easy commissioning;
- Hard acrylic screen window with high wear and scratch resistance;
- Silicone panel and keys suit wide ambient temperatures;
- CAN bus port connects J1939 electronic engines: monitors engine data (coolant temperature, oil pressure, speed, fuel consumption, etc.) and controls start/stop/speed via CAN bus;
- Measures and displays three-phase voltage, current, frequency and power for mains and generator;
- Mains: phase-loss and wrong-phase-sequence detection; generator: over/under voltage, over/under frequency, over-current, over-power, reverse-power, phase-loss and wrong-phase-sequence protection;
- Synchronising parameters: voltage, frequency and phase-angle difference between generator and mains; automatic modes: no-load running, on-load running and paralleling on demand;
- Soft load transfer when paralleling and separating sets;
- Three fixed analogue sensors (temperature, oil pressure, liquid level);
- Two configurable analogue sensors (temperature, pressure or liquid level);
- Accurate monitoring of engine parameters;
- Control & protection: automatic start/stop, breaker close/trip and comprehensive fault display and protection;
- Ten outputs and ten programmable inputs;
- Selectable start-success conditions (speed sensor, oil pressure, generator);
- Wide supply range DC 8–35 V suits various starter-battery voltages;
- Event log and real-time clock with scheduled start/stop (monthly/weekly/daily, with or without load);
- Total run-hours A/B and energy A/B, resettable for user statistics;
- Maintenance function with configurable due-time actions (warning, alarm shutdown or trip shutdown);
- All parameters adjusted digitally — no analogue potentiometers — for higher reliability and stability;
- Rubber seal between enclosure and control panel gives IP65 ingress protection;
- Metal mounting clips perform well in high-temperature environments;
- Modular design: flame-retardant ABS housing, plug-in terminals and flush mounting — compact and easy to install;
- GPS positioning (with the Cloud Cat module, via the cloud platform)

## Options

| Engine | Alternator | Fuel System | Genset |
|---|---|---|---|
| □ Jacket water heater | □ Anti-condensation heater | □ Bunded base fuel tank | □ Open set |
| □ Automatic engine oil make-up | □ Radio-interference suppressor | □ Automatic refuelling system | □ Trailer |
| □ Low oil level alarm | □ Winding temp. monitoring | | □ Container type |
| □ Stage V | □ Bearing temp. monitoring | | □ ComAp, DSE, DEIF |
| | □ Anti-mould, damp and salt fog | | □ IP54 protection |

Note: specifications are subject to change due to continuous improvement. Please confirm with our sales representative before ordering.

**Jiangsu Golden Waves Energy Technology Co., Ltd.**
Address: 150 Pubin Rd, Jiangbei New Area, Nanjing
http://www.asiaeleph.com

**ASIA ELEPH® Custom Rental**